

PARKER COLLECTION

**Glazed
Vitrified
Tiles**

colortile
ceramics & innovation

when,

**ceramic blends
with innovation,
innovation in
ceramic happens.**

We have specialisation in manufacturing high-quality VITRIFIED and WALL TILES for every possible Architectural, Residential and Commercial use.

Colortile is one of the leading manufacturers of Glazed Vitrified Tiles and Ceramic Body Tiles in India. For over a decade now, Colortile has been innovating and manufacturing Floor and Wall Tiles with an aim to excel in the tile field and also to satisfy its ever-increasing client base.

We have installed a production capacity of over 22 million square meters per annum, spread over 3 manufacturing units at Morbi, Gujarat, India. Our factories are well-equipped with state-of-the-art technology and modernised laboratories to keep us ahead of the curve.

Mission


We manufacture wall and floor tiles that rank high on quality and aesthetic value irrespective of the place where they are applied. We are the first choice of residential, commercial and public buildings for indoor and outdoor applications. We forge a long-term partnership with all our clients by providing them excellent service. We keep our ears close to the ground to satisfy the needs of an evolving market.

Vision

Always putting the bar high and the dream to achieve them with all the dynamism in designs, we have invested in the latest technology to make COLORTILE a top-notch brand in the tile world. We, at COLORTILE family promise ourselves to grow, innovate and maintain the quality forever.

Innovation

Inspiration

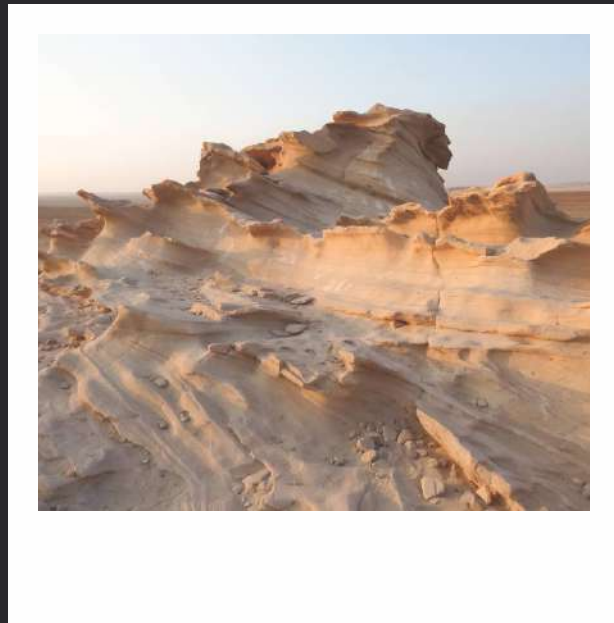

Inspired by the raw elegance and abounding grace of the nature that resides in the solidarity of the earth.




PARKER

**GLAZED
VITRIFIED
TILES**

Inspired by the beauty of natural stones from around the world.

The Indian consumer is becoming more and more design & decor conscious by the day. A home is no more a necessity but it is a reflection of one's status, personality & taste. Therefore, the demand for premium quality vitrified tiles with beautiful designs and perfect craftsmanship has increased by leaps & bounds.


COLORTILE presents a unique collection of Glazed Vitrified Tiles to fulfill the ever-expanding needs and expectations of the Indian consumer. COLORTILE range of Glazed Vitrified Tiles in an extensive array of exclusive designs in the 600x1200mm & 600x600mm sizes available through a wide distribution network.

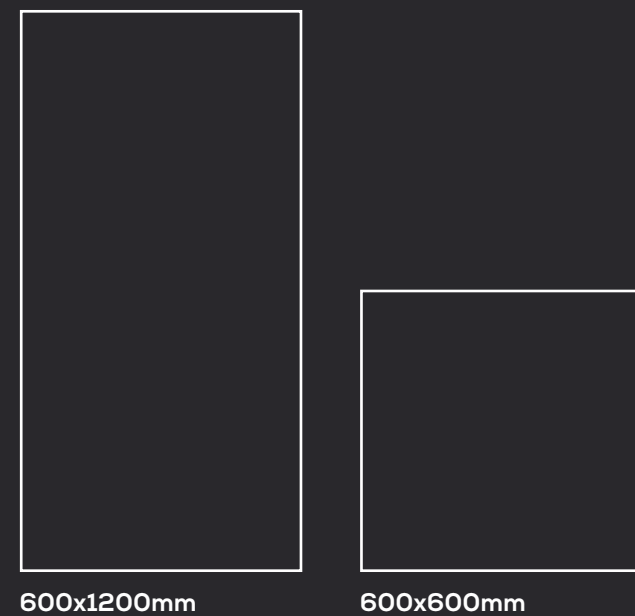

600x1200mm

600x600mm

2 Sizes | 5 Colors | 1 Finish

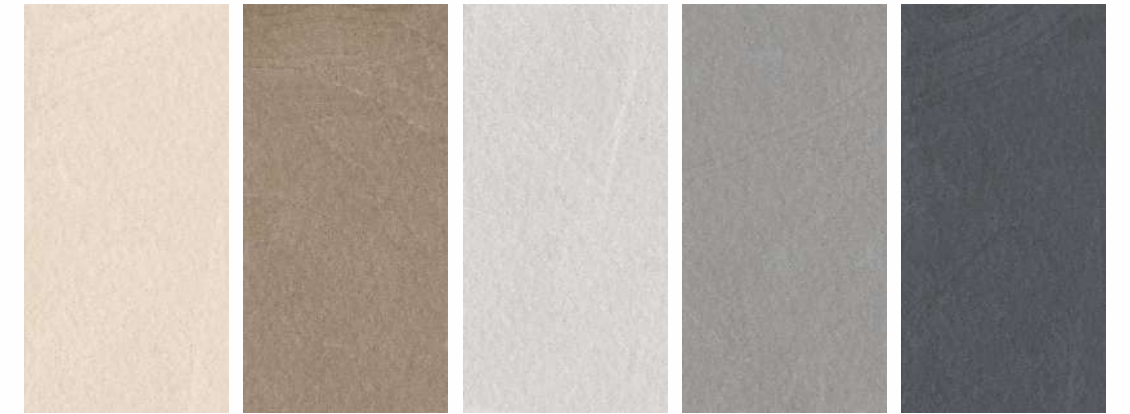

Parker
Crema


Parker
Taupe

Parker
Bianco


Parker
Gris

Parker
Nero

Application areas

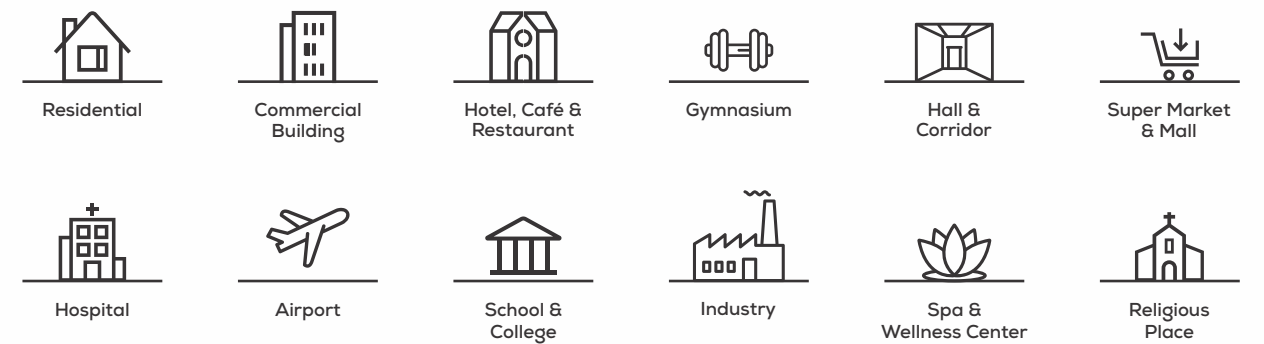

Technical specifications

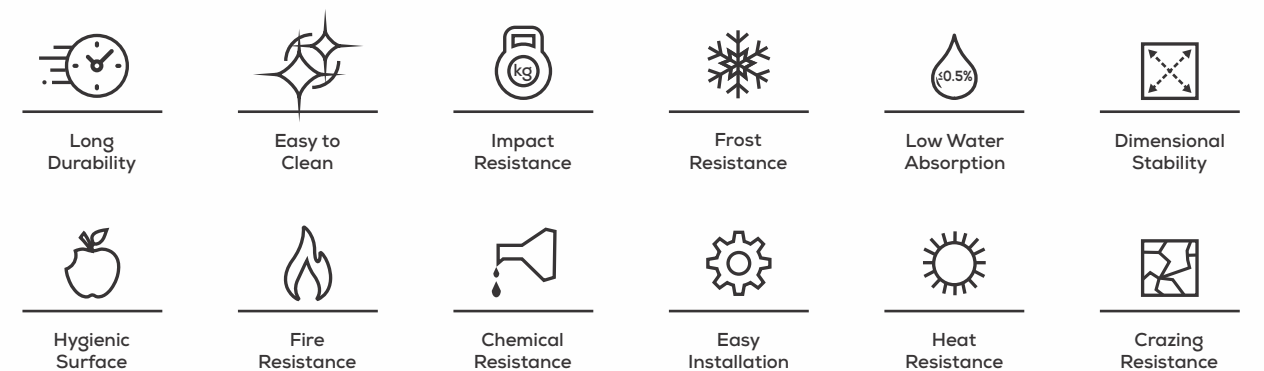

PARKER


Parker Crema
Parker Taupe
Parker Bianco
Parker Gris
Parker Nero

Sizes

600x1200mm
600x600mm

Finish

Relief Matt

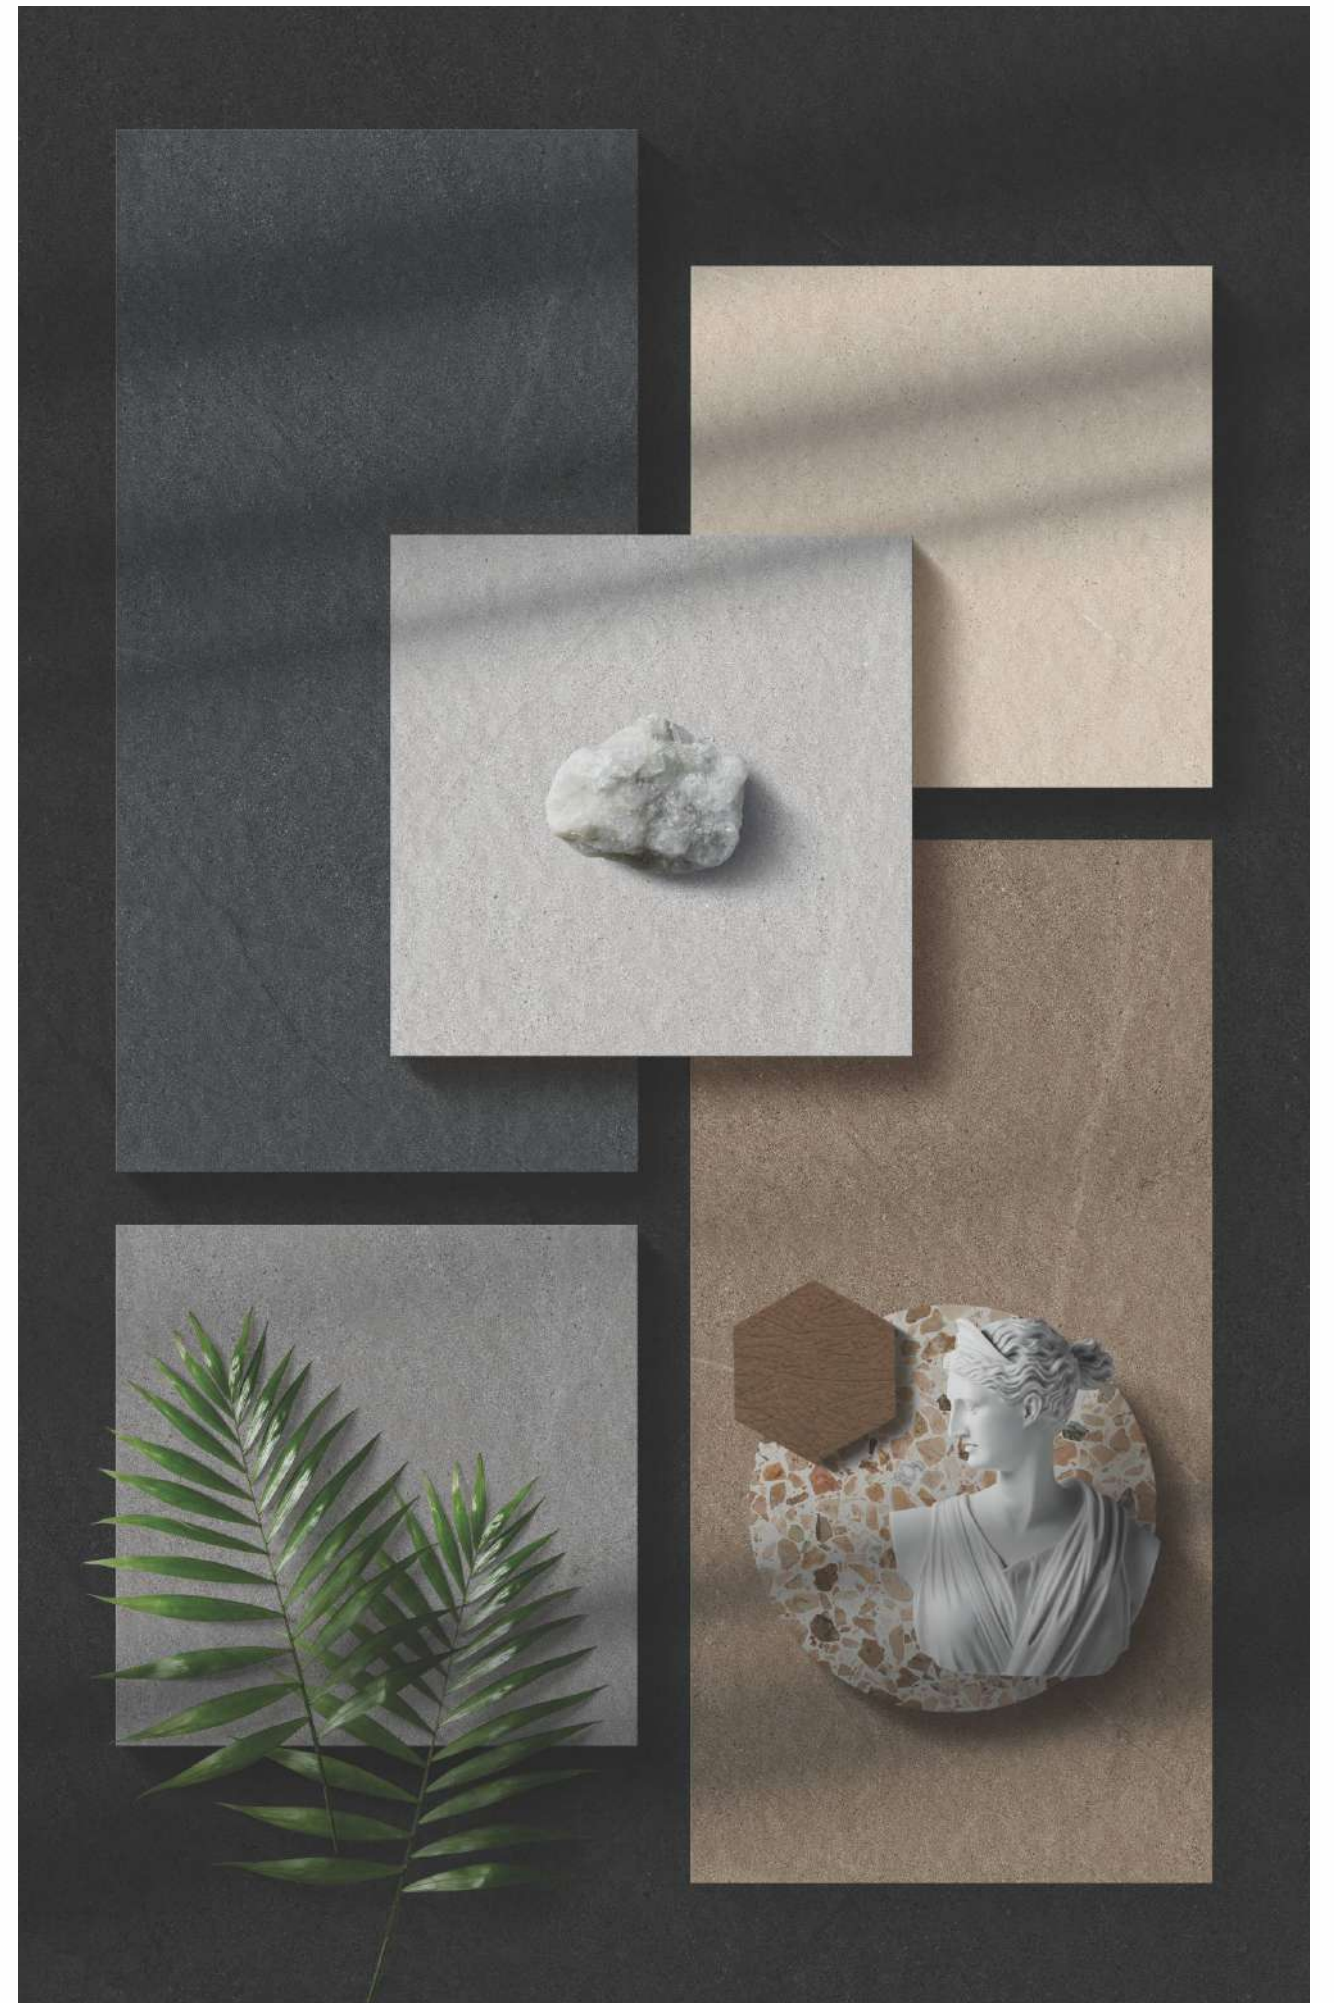



FLOOR
Parker Crema | Size - 600x1200mm

Parker Crema




600x1200mm

4 Faces



600x600mm*


6 Faces




Use for Wall



Use for Floor



4mm Spacer Recommended



9mm Thickness



FLOOR
Parker Taupe | Size - 600x1200mm

Parker Taupe



600x1200mm

4 Faces



600x600mm*


6 Faces




Use for
Wall



Use for
Floor



4mm Spacer
Recommended




9mm
Thickness




FLOOR
Parker Bianco | Size - 600x1200mm

Parker Bianco

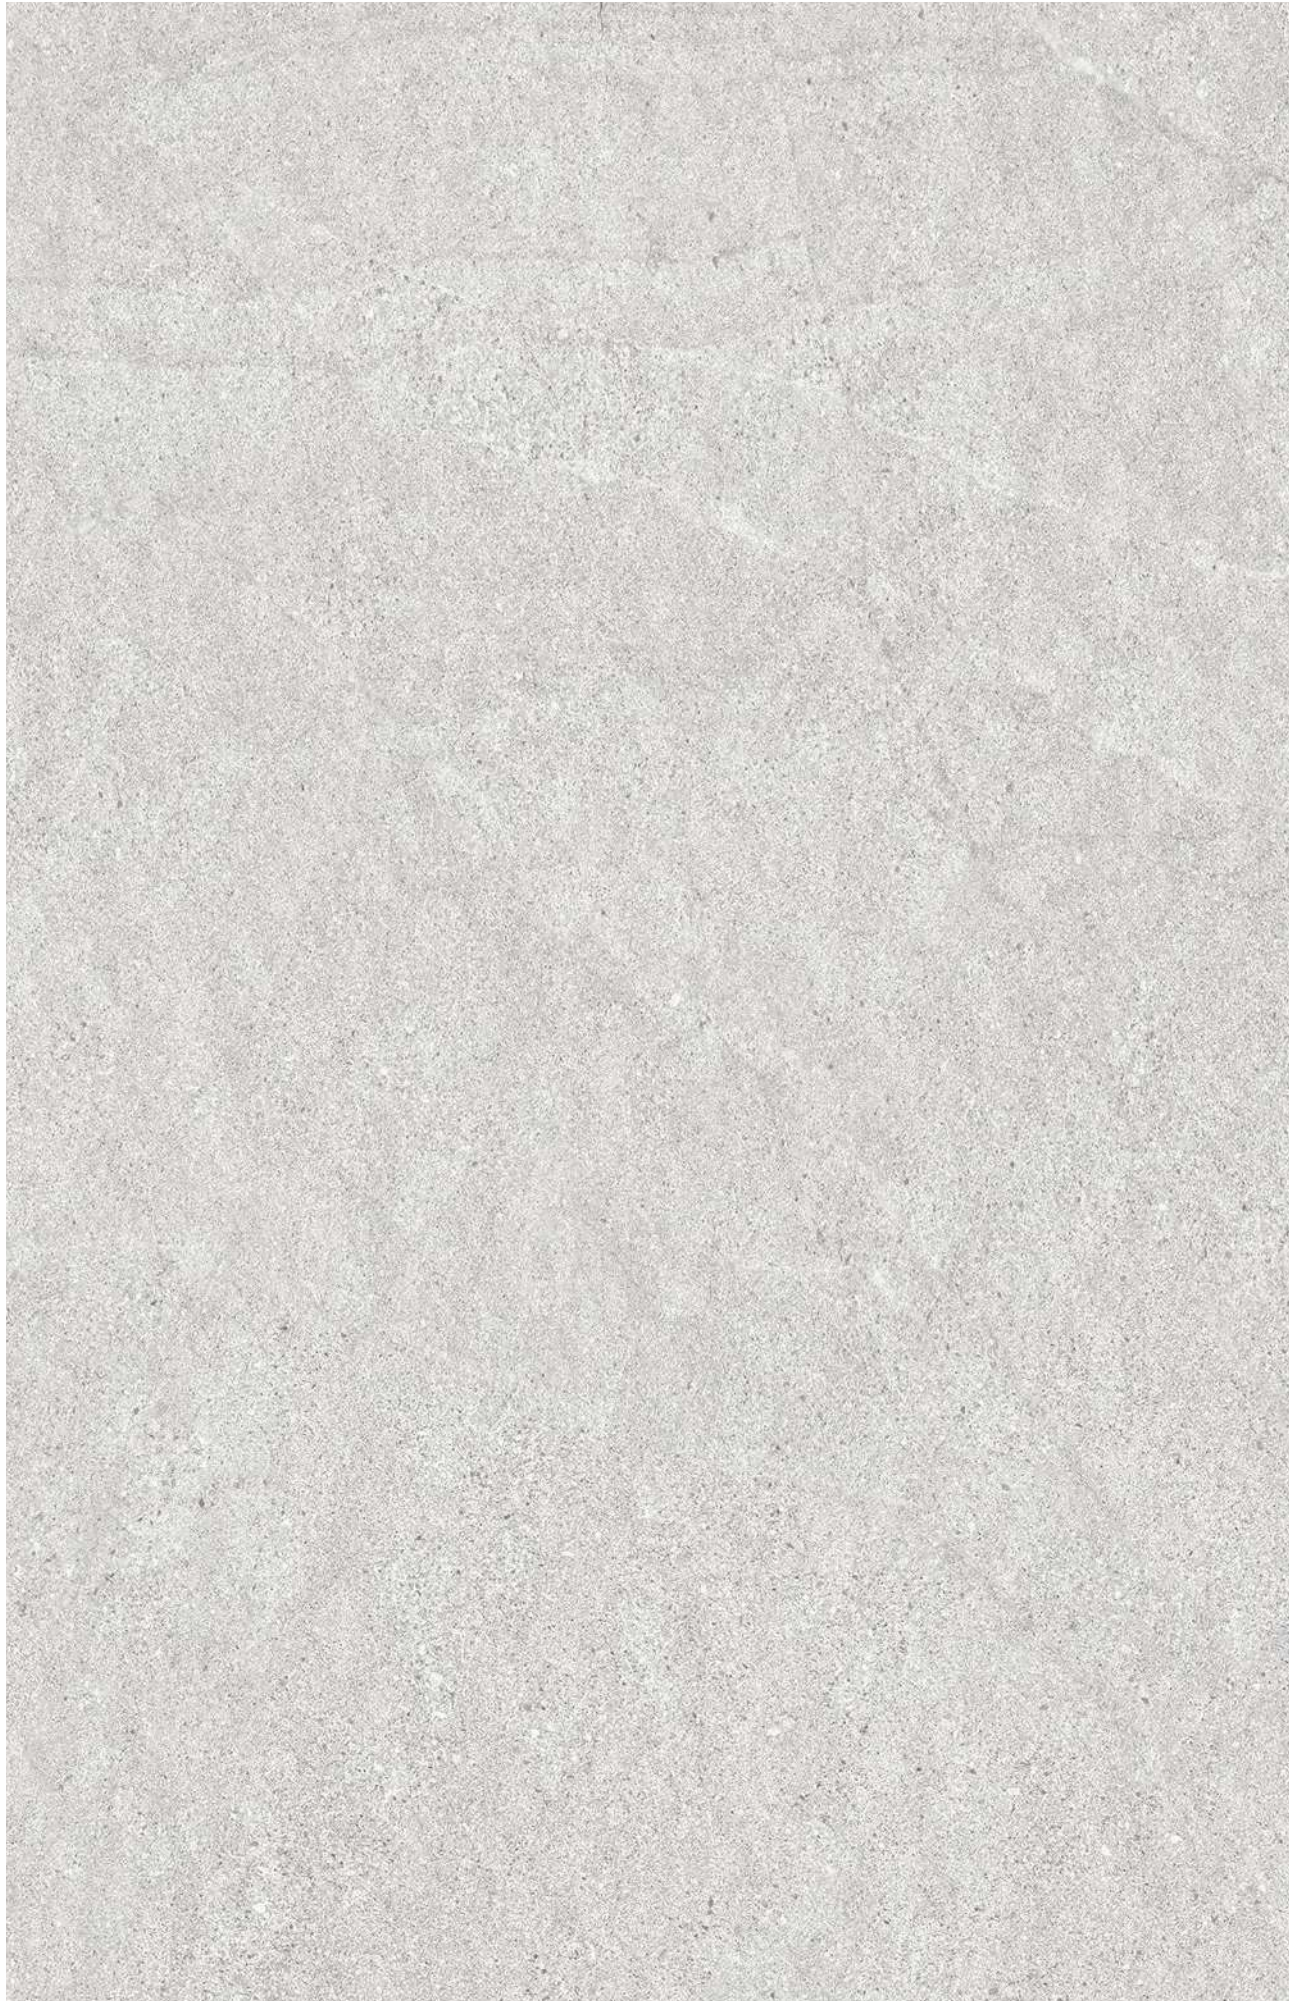


600x1200mm

4 Faces

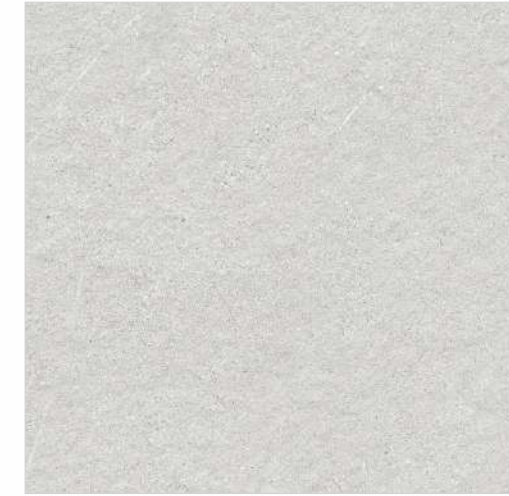

600x600mm*

6 Faces



Use for
Wall



Use for
Floor



4mm Spacer
Recommended



9mm
Thickness



FLOOR
Parker Gris | Size - 600x1200mm

Parker Gris




600x1200mm

4 Faces



600x600mm*


6 Faces




Use for
Wall



Use for
Floor



4mm Spacer
Recommended




9mm
Thickness




FLOOR
Parker Nero | Size - 600x1200mm

Parker Nero

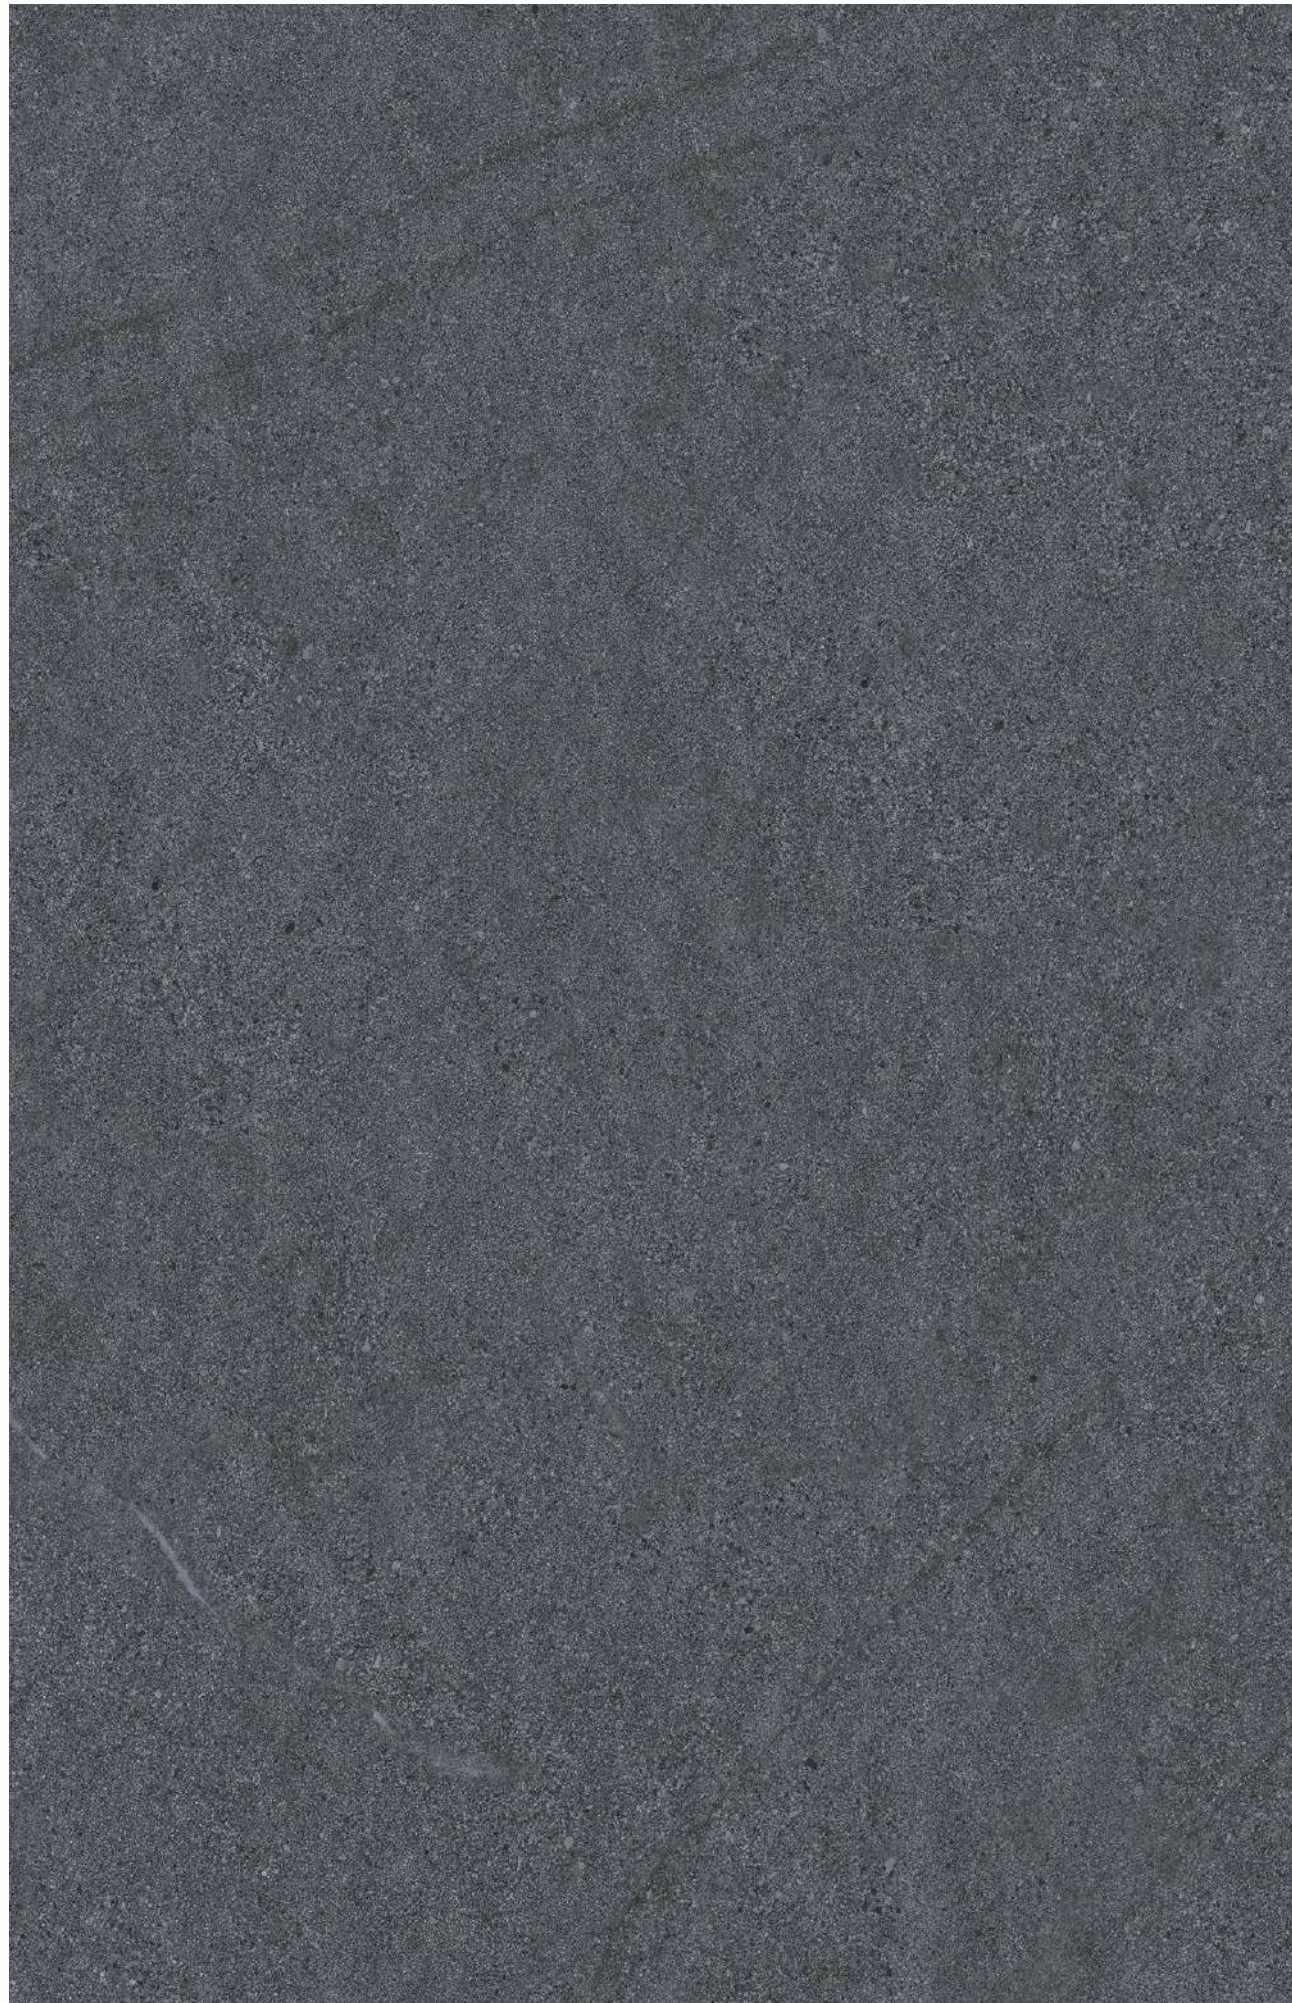


600x1200mm

4 Faces

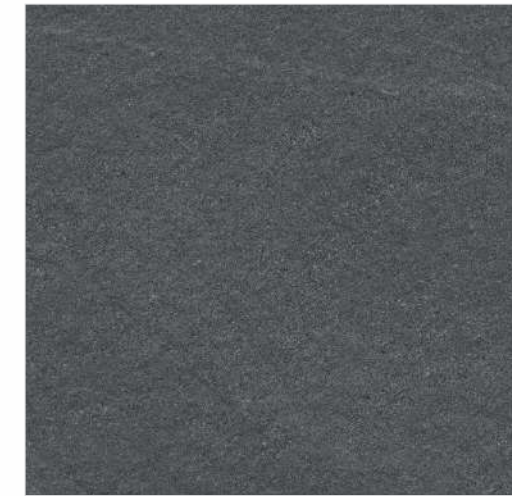

600x600mm*


6 Faces




Use for Wall



Use for Floor



4mm Spacer Recommended



9mm Thickness

Colortile Quality Standards

Standards according to ISO 13006: Annex G - EN 14411: Annex G. Dry - Pressed Ceramic Tiles. Group BIa (Eb ≤ 0.5%)

Technical Feature	Test Method	Requirements		Colortile Values	
		%	mm	%	mm

A. Dimensions and Surface Quality

Length and Width	UNI EN ISO 10545-2	± 0.6%	± 2.0	± 0.20%	± 1.0	
Thickness		± 5.0%	± 0.5	± 4.00%	± 0.4	
Straightness of Sides		± 0.5%	± 1.5	± 0.20%	± 1.0	
Rectangularity		± 0.5%	± 2.0	± 0.20%	± 1.2	
Surface Flatness		a) Centre curvature b) Edge curvature c) Warp	± 0.5%	± 2.0	± 0.10%	± 0.8
			± 0.5%	± 2.0	± 0.10%	± 0.8
	± 0.5%		± 2.0	± 0.10%	± 0.8	
Surface Quality	A minimum of 95% of the tiles shall be free from visible defects that would impair the appearance of a major area of tiles.		Compliant			

B. Physical Properties

Water Absorption	UNI EN ISO 10545-3	E _b ≤ 0.5% Individual maximum : 0.6% (absorbed water mass)	E _b ≤ 0.1% (absorbed water mass)
Breaking Strength	UNI EN ISO 10545-4	Min. 1300 N	≥ 1700 N
Modulus of Rupture		Average minimum 35 N/mm ² Individual minimum 32 N/mm ²	≥ 37 N/mm ²
Frost Resistance	UNI EN ISO 10545-12	Required	Compliant
Coefficient of Linear Thermal Expansion From Ambient Temperature to 100°C	UNI EN ISO 10545-8	Required	6 x 10 ⁻⁶ K ⁻¹ max
Scratch Hardness (Mohs scale)	EN 101	Declared by the producer	3 to 6 Depends on Finish & Color
Crazing Resistance	UNI EN ISO 10545-11	Declared by the producer	4 Cycle Pass

C. Chemical Properties

Resistance to Staining	UNI EN ISO 10545-14	Minimum Class 3	5
Resistance to Household Chemicals and Swimming Pool Salts	UNI EN ISO 10545-13	Minimum GB	GA
Resistance to Low Concentrations of Acids and Alkalis		To be reported	GLA
Resistance to High Concentrations of Acids and Alkalis		To be reported	GHA

Note: Colours shown are as accurate as the limitations of the printing results on paper are possible. Prospective customers are advised to inspect a sample of the tile before placing the order. Every effort has been taken to ensure the accuracy of the information given. However, the company reserves its right to change/alter the specifications without any prior notice. Sometime shade variation or size variation may occur, as this is inherent property of ceramic tile industry. Before fixing the tiles, it is advised to follow the laying instructions printed on the corrugated box of the tile. Company does not take/carry any responsibility of what so ever nature, once tiles are laid.

Standard Pallet Packing

Pallet Type	Size	Thickness (Approx.)	pcs / Box	m ² / Box	kg / Box	Box / Pallet	m ² / Pallet	Pallet Size
A	600x600mm	8.5mm	4 pcs	1.44 Sq. Mtr.	28.5 kg	40	57.60 Sq. Mtr.	925x1100mm
A	600x1200mm	9.0mm	2 pcs	1.44 Sq. Mtr.	29.30 kg	68	97.92 Sq. Mtr.	1100x1100mm
B	600x1200mm	9.0mm	2 pcs	1.44 Sq. Mtr.	29.30 kg (Approx.)	26	37.44 Sq. Mtr.	675x1200mm
C	600x1200mm	9.0mm	2 pcs	1.44 Sq. Mtr.	29.30 kg (Approx.)	29	41.76 Sq. Mtr.	750x1200mm

Euro Pallet Packing

Pallet Type	Size	Thickness (Approx.)	pcs / Box	m ² / Box	kg / Box	Box / Pallet	m ² / Pallet	Pallet Size
A	600x600mm	8.5mm	4 pcs	1.44 Sq. Mtr.	28.5 kg	36	51.84 Sq. Mtr.	800x1200mm
A	600x1200mm	9.0mm	2 pcs	1.44 Sq. Mtr.	29.30 kg (Approx.)	30	43.20 Sq. Mtr.	800x1200mm

Packing Details

Size	Thickness (Approx.)	pcs / Box	m ² / Box	kg / Box
600x1200mm	9.0mm	2 pcs	1.44 Sq. Mtr.	29.30 kg (Approx.)

colortile
ceramics & innovation

Color Granito Pvt. Ltd.

At. Ratavirda Village,
Santanpar Road, Tal. Wankaner - 363 621,
Dist. Morbi, Gujarat, INDIA

info@colortile.in | www.colortile.in

